KODAK Products


Product Data Sheet


D-01-104-10

KODAK MAX Super Alkaline Battery KD

Effective: 07/01/2021

https://www.mega-piles.com/

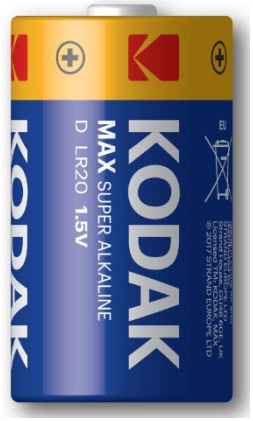

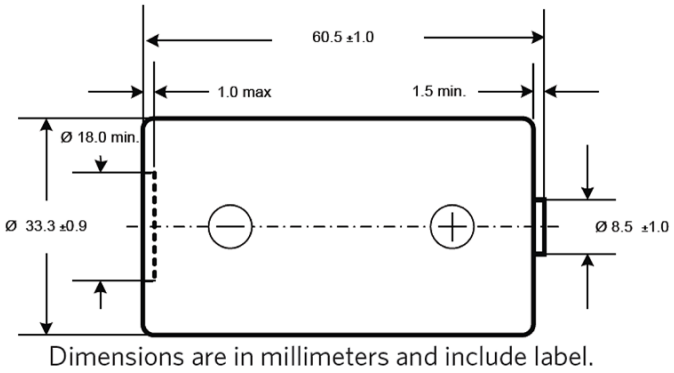

Dimensions are in millimeters and include label.

Chemical system:	Alkaline, MnO2 / KOH / Zn
Designations:	IEC LR20, ANSI 13A
Nominal Voltage:	1.5V
Nominal Capacity:	19500 mAh at 39 Ohms to 0.8 Volts
Internal Impedance:	0.08 Ohms (typically)
Average Weight:	141 g
Average Volume:	53.8 cm^3
Recommended storage temperature:	10 – 25 °C, RH no more than 75%
Operating temperatures:	-20 – 54 °C
Reaction:	2 MnO_2 + Zn + H2O → 2 MnOOH + ZnO
Terminals:	Flat contacts, protruding negative
Jacket:	Aluminium label

Note:
1) No added Mercury / 99.9999% Mercury Free
2) No added Lead /99.999% Lead Free
3) No added Cadmium / 99.9999% Cadmium Free
4) No added PFOS (Perfluorooctane sulfonates)
5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2013/56/EU & 2006/122/EC.
6) SDS sheets are available on request from Strand Europe Ltd.

Brand Licensee
KODAK Batteries
KODAK LED Bulbs
KODAK Headphones
KODAK LED Flashlights

The Kodak trademark, logo and trade dress are used under license from Kodak.
© 2021 STRAND EUROPE LTD.
www.kodakbatteries.strandeurope.com