





<https://www.mega-piles.com/>

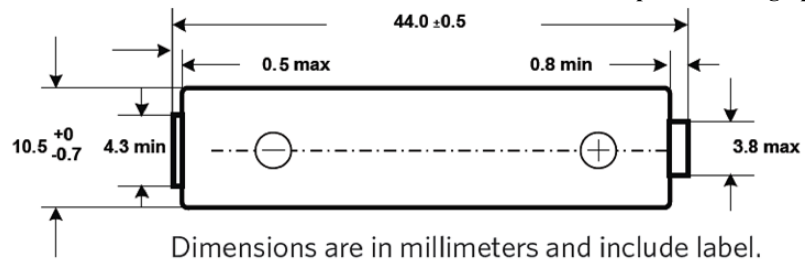

Chemical system:	Alkaline, MnO ₂ / KOH / Zn
Designations:	IEC LR03, ANSI 24A
Nominal Voltage:	1.5V
Nominal Capacity:	1300 mAh at 75 Ohms to 0.8 Volts
Internal Impedance:	0.13 Ohms (typically)
Average Weight:	12 g
Average Volume:	3.8 cm ³
Recommended storage temperature:	10 – 25 °C, RH no more than 75%
Operating temperatures:	-20 – 54 °C
Reaction:	2 MnO ₂ + Zn + H ₂ O → 2 MnOOH + ZnO
Terminals:	Flat contacts, protruding negative
Jacket:	Aluminium label

Note:

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead /99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2013/56/EU & 2006/122/EC.
- 6) SDS sheets are available on request from Strand Europe Ltd.



The Kodak trademark, logo and trade dress are used under license from Kodak.
 © 2021 STRAND EUROPE LTD.
www.kodakbatteries.strandurope.com