




<https://www.mega-piles.com/>

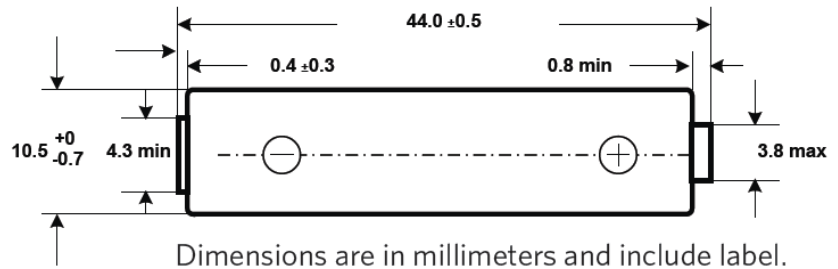

Chemical system:	Nickel-Metal Hydride			
Designations:	IEC HR03, ANSI 1.2H1			
Nominal Voltage:	1.2V			
Nominal Capacity:	650 mAh	850 mAh	900 mAh	1000 mAh
Rated, Minimum Capacity: (IEC/EN 61951-2)	600 mAh	800 mAh	800 mAh	900 mAh
Charging Condition:	65 mA for 16h	85 mA for 16h	90mA for 16h	100mA for 16h
Maximum continuous discharge:	1.2 A to 1.0 V	1.6 A to 1.0 V	1.6 A to 1.0 V	1.8A to 1.0 V
Maximum intermittent discharge:	1.8 A	2.4 A	2.4 A	2.7 A
Minimum charging cycles:	500	1000	300	300
Average Weight:	12.5 g			
Recommended storage temperature:	+5 – +25 °C, RH no more than 75%			
Operating temperatures:	0 – 50 °C			
Terminals:	Flat contacts			
Jacket:	PVC Label			

Note:

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead /99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2006/66/EC, 2006/122/EC
- 6) SDS sheets are available on request from Strand Europe Ltd.
- 7) Charge or Discharge at extreme high or low temperature will significantly affect service and cycle life.
- 8) For best performance after long period of non-use, charge and discharge the battery several times.



Brand Licensee
 KODAK Batteries
 KODAK LED Bulbs
 KODAK Headphones
 KODAK LED Flashlights

The Kodak trademark, logo and trade dress are used under license from Kodak.
 © 2021 STRAND EUROPE LTD.
www.kodakbatteries.strand europe.com