

# GP Batteries

## DATA SHEET

Model No.: **GP364F**

Description : Mercury and Lead Free button cell  
 Chemical System : Zinc/Silver Oxide  
 Nominal Voltage : 1.55V  
 Nominal Dimension :  $\Phi 6.80\text{mm} \times 2.15\text{mm}$   
 Applications : Analog watch  
 Average Weight : 0.35g  
 Shelf Life : Not less than 90% of the service capacity within first year storage at  $20 \pm 2^\circ\text{C}$  55  $\pm$  20 %RH;  
 Warranty 1 year.


Date Code : Unless otherwise specified, each cell will carry a numeric year code and an alphabetical month code.

Close Circuit Voltage : 1.25 V(min.) (load resistor  $400\Omega$  at  $20 \pm 2^\circ\text{C}$  for 0.1 to 2 seconds)  
 Nominal Service Life( at  $20 \pm 2^\circ\text{C}$ ) : 172hrs (load  $15\text{k}\Omega$  cut off 1.2V)  
 575hrs (load  $50\text{k}\Omega$  cut off 1.2V)

Average Service Capacity(  $20 \pm 2^\circ\text{C}$ ) : 18mAh (load  $50\text{k}\Omega$  to cut off 1.2V)

Cross References:  
 IEC Maxell Duracell Others

SR60	SR621SW	D364	V364
------	---------	------	------

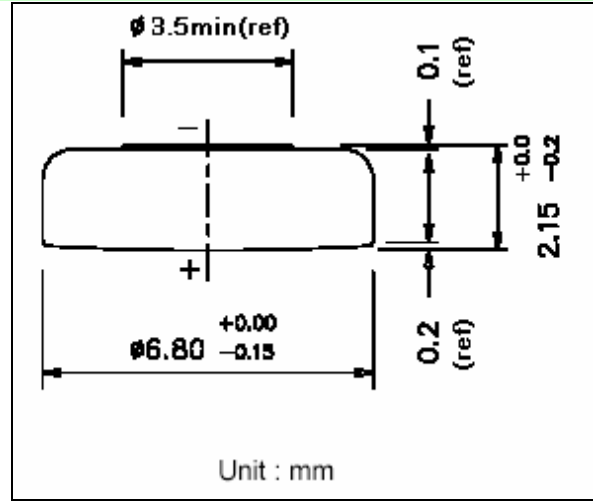

Typical Discharge characteristics at  $20 \pm 2^\circ\text{C}$

