


Model	CR1620	
System	Manganese dioxide-Li/Organic Electrolyte	
Nominal Voltage (V)	3	
Nominal Capacity (mAh)*	78	
Nominal Discharge Current (mA)	0.1	
Temperature Ranges (deg. C)	min.	max.
Operating	-20	+85
Weight (g)**	1.2	
Dimensions (mm)**		
Diameter	16.0	
Height	2.0	
Negative Cap Diameter	13.9	
UL Recognition	MH12568	

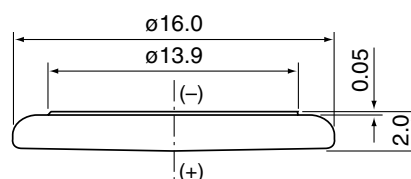


Available Terminals and Wire Connectors


None, bulk only.

Characteristics


● Discharge Characteristics

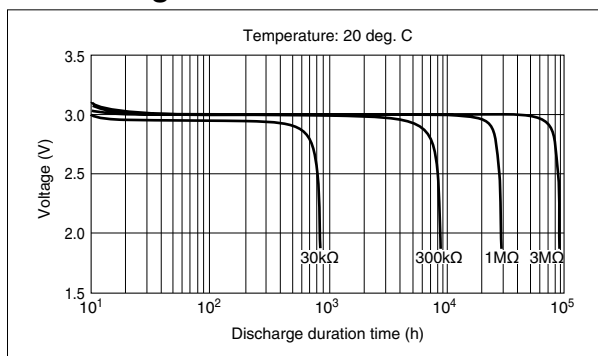


● Temperature Characteristics

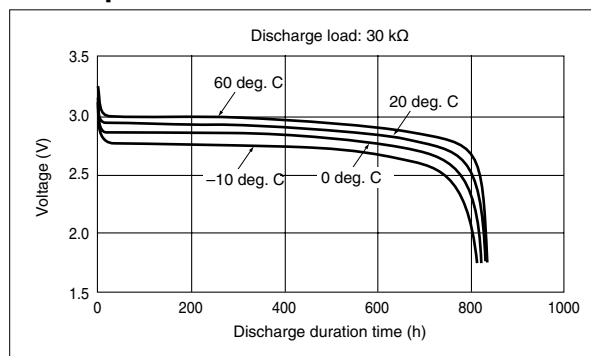

● Pulse Discharge Characteristics

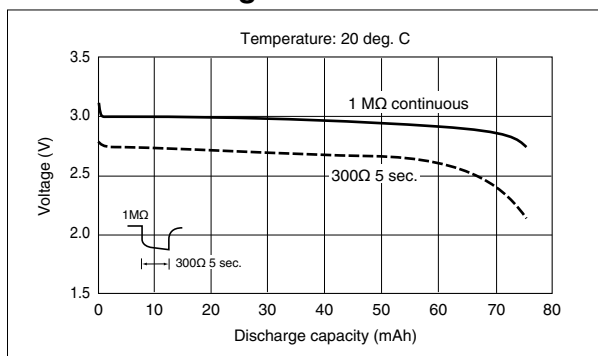

● Relationship between Discharge Current and Discharge Capacity

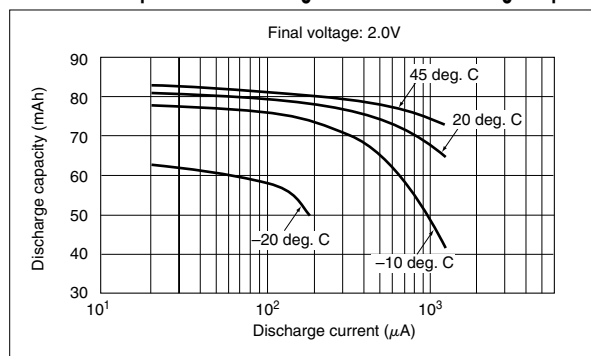

* Nominal capacity indicates duration until the voltage drops down to 2.0V when discharged at a nominal discharge current at 20 deg. C.

** Dimensions and weight are for the battery itself, but may vary depending on the shape of terminals or other factors.