
Data Sheet Recommended Application: Electronic 6632

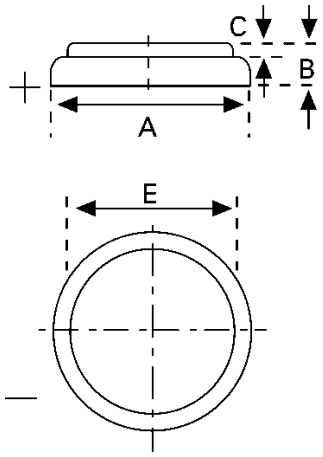

Type Designation	6632
Designation IEC	CR1632
System	$Li\text{-}MnO_2$
	Li-Manganese dioxide / organic electrolyte
Shelf Life *	10 years
UL Recognition	pending
Nominal Voltage [V]	3
Typical Capacity C [mAh]	135 (Load 15000 Ω at 20° C down to 2.5 V)

Permissible Temperature Range	min:	max:
Storage	**-55° C**	**60° C**
Discharge	**-30° C**	**60° C**

Weight, approx. [g]	1.80
Volume [ccm]	0.60

Dimensions [mm]	min:	max:
A	**15.70**	**16.00**
B	**2.90**	**3.20**
E	**13.00**	
C	**0.20**	

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage[V]	2.5
Continuous	15000 Ω	Time [h]	710
24h/d, 7d/w		Capacity [mAh]	135
		Energy [mWh]	

No publication or circulation of data to third parties without consent of VARTA Consumer Batteries

* In consideration of typical loss of capacity at storage and application.