

Description : Alkaline High Voltage Battery

Nominal Voltage : 12Volts

Nominal Dimensions : Ø8.0mm×28.2mm

Terminal : Nickel plated flat contacts - protruded
red(+); recessed black (-)

Jacket : Metal jacket

Internal Connection : Pressure

Applications : Remote controller

Average Weight : 4.4g

Date Code : Unless otherwise specified, each batteries will carry a numeric year code and analogue month code

Shelf Life : Not less than 90% of the service capacity within first year , not less than 85% of the service capacity with third year storage at 22 ± 3 °C
40-80 %RH

Insulation : 5MΩ min.

Resistance


Close Circuit Voltage : 10.5Volts (min.)(load resistor 1.6kΩ
at 22 ± 3 °C for 0.1 to 2 seconds)

Current Drain : Under 15mA pulse, 0.5mA
continuous

Nominal Service Life : 38hrs (at 20kΩ load)
(to 6.0V at 22 ± 3 °C)



Average Service : 20mAh(at 20kΩ load)

Capacity
(to 6.0V at 22 ± 3 °C)

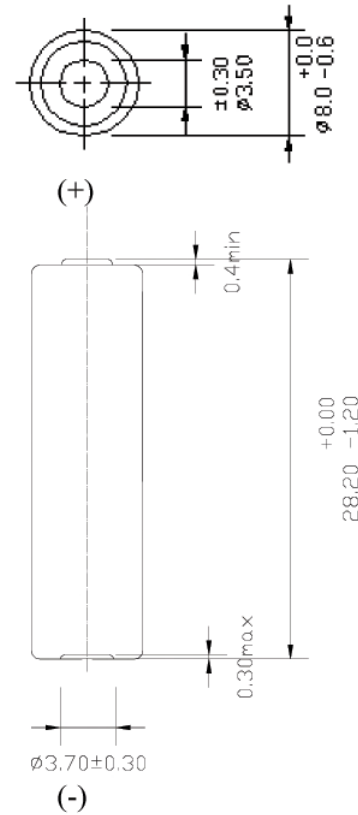

Unit : mm

Typical Discharge characteristics at 22 ± 3 °C

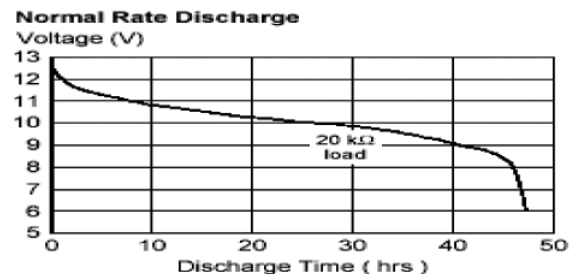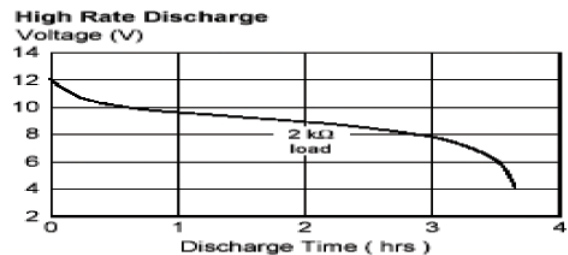

No publication or circulation of data to third parties without consent of VARTA Consumer Batteries