

battery type: Lithium Button Cell
battery size: CR1632
chemical system: Lithium Manganese Dioxide



<https://www.mega-piles.com/>

nominal voltage: 3.0 V
open circuit voltage: 3.0...3.4 V (new battery)
 2.9...3.4 V (after 1 year storage at 20°C)

Conditions

all measurements at 22 ± 2°C ambient

capacity rated: 120 mAh (continuous discharge at 47kΩ load; 24hours/day)
 End Voltage (EV): 2.0V

minimum: 110 mAh (continuous discharge at 47kΩ load; 24hours/day)
 End Voltage (EV): 2.0V

Standard discharge time minimum: 225 h (at 6.8kΩ load EV: 2.0V) (for QC measurement)


Discharge currents standard: 0.1 mA

max. recommended current under continuous discharge: 3 mA


max. recommended current under pulse discharge: 10 mA

Discharge diagrams:

Discharge Characteristics on Load

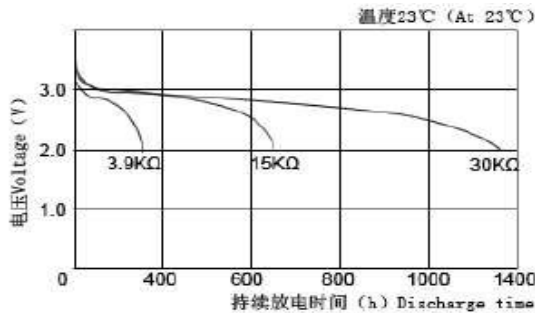

Discharge Characteristics on Temperature

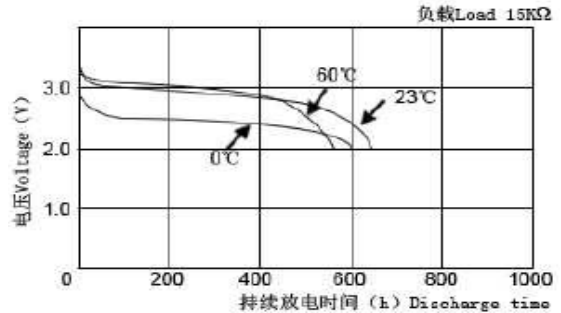


shelf life: 10 years under proper storage conditions (ta: ≤ 22°C; RH: 60 ± 15%)

operating temperature range: - 20...60 °C

mechanical specifications:

dimensions in mm

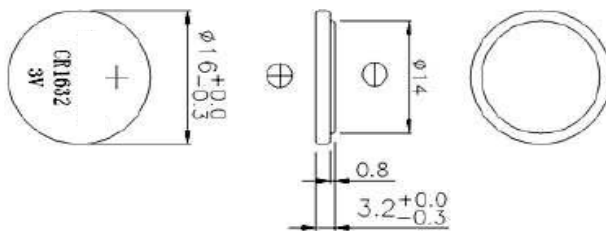

nominal weight: 2.3 g



blister card dimensions: 56 x 71.5mm

weight: 4.1g (incl. battery)

	ANSMANN Specifications for model:	CR1632 Lithium Button Cell blister package
	data sheet no. / part no.	1516-0004
	supplier no.	702572
	author / date	TG / 24.06.2015