

battery type:
battery size:
chemical system:

Alkaline Manganese (Mercury free)
 IEC: LR6; JIS: AM-3; ANSI: AA; MN1500; Mignon
 Zn / KOH-H₂O / MnO₂



<https://www.mega-piles.com/>

nominal voltage: 1.5 V
open circuit voltage: 1.57...1.62 V
 1.55...1.62 V

Conditions

new battery
 after 1 year storage at 20°C

capacity rated: 2700 mAh

all measurements at 20°C ambient
 discharge at 10mA load; 24hours/day
 End Voltage (EV): 0.8V

2400 mAh

discharge at 75ohms load; 24hours/day
 End Voltage (EV): 0.8V

minimum: 2200 mAh

discharge at 35mA constant current
 End Voltage (EV): 0.8V

700 mAh

discharge at 1000mA constant current
 End Voltage (EV): 0.8V

typical service output (new batteries)

≥ 330 cycles discharge at 1000mA; EV: 0.9V
 discharge 10s/m 1h/d

≥ 79 h load resistor: 43ohms; EV: 0.9V
 discharge 4h/d

≥ 38 min discharge at 1000mA; EV: 0.9V
 discharge 24h/d

≥ 17.5 h load resistor: 10ohms; EV: 0.9V
 discharge 24h/d

≥ 6.2 h discharge at 250mA; EV: 0.9V
 discharge 1h/d

internal resistance: ≤ 0.25 Ω

at 1kHz, sine wave measurement
 full battery

shelf life: 7 years under proper storage conditions

leakage resistance

over discharge: no leakage
 high temperature: no leakage

10ohms continuous discharge for 48h; ta: 20°C; RH: 60±15%
 store 20days at ta: 60°C; RH:90±5%



ambient temperature range: - 10...50 °C

recommended storage conditions: 5...25 °C ambient temperature
 45...75 % rel. humidity

mechanical specifications

cell dimensions

diameter d1: 14.4 - 0.5 mm
 diameter d2: 5.4 - 0.5 mm
 height h1: 50.4 - 0.5 mm
 height h2: 1.7 - 0.5 mm
 weight: 23 ± 2 g

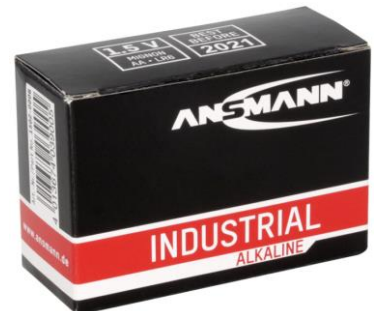

package dimensions: 72 x 29 x 51 mm
 weight (incl. batteries): 233 ± 5 g

	ANSMANN Specifications for model:	Ansmann Industrial Alkaline Battery AA - size 10pcs box
	data sheet no. / part no.	1502-0006
	supplier no.	701381
	author / date	TG / 25.02.2015