

battery type:
battery size:
chemical system:

Alkaline Manganese Dioxide (mercury free)
 A27; 27A; MN27; L828
 Zn / KOH-H₂O / MnO₂



<https://www.mega-piles.com/>

nominal voltage: 12 V
open circuit voltage: 12.3...12.9 V
 12.2...12.9 V

Conditions
 new battery
 after 1 year storage at 20°C



all measurements at 22 ± 2°C ambient

capacity
 rated: 20 mAh discharge under 20kΩ load; 24hours/day
 End Voltage (EV): 6.0V
 minimum: 18 mAh discharge under 20kΩ load; 24hours/day
 End Voltage (EV): 6.0V

Standard discharge time
 nominal: 50 h at 20kΩ load new battery
 EV: 6.0V
 MAD:
 (minimum average duration) 45 h at 20kΩ load after 12 months storage at 20°C
 EV: 6.0V
 47 h at 20kΩ load for IQC measurement
 EV: 6.0V (tested within 30 days after delivery)

Discharge currents
 standard: 0.05 mA
 max. recommended current under continuous discharge: 0.5 mA
 max. recommended current under pulse discharge: 5 mA

Discharge diagrams:

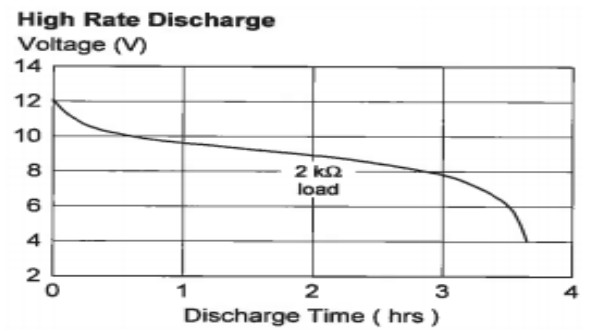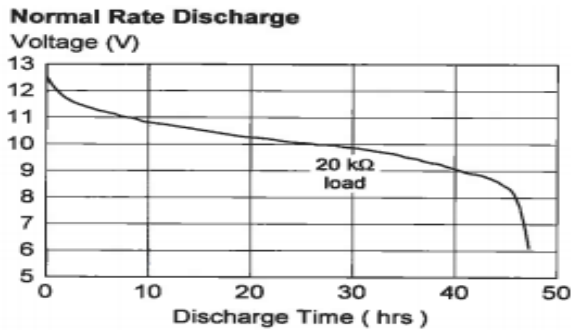


shelf life: 3 years under proper storage conditions (ta: ≤ 22°C; RH: 60 ± 15%)
 ≥90 % remaining capacity after 12 months storage

operating temperature: - 20...60 °C
storage temperature: 5...25 °C (recommended)

mechanical specifications:
 Dimensions(mm):

	min	max
Φ	7.4	8.0
A	27.0	28.2
F	3.2	3.8



nominal weight: 4.8 g



blister card
 dimensions: 56 x 71.5mm
 weight: 6.6g (incl. battery)

	ANSMANN Specifications for model:	A27 (27A, L828) Alkaline Battery "Hg free" blister package
	data sheet no. / part no.	1516-0001
	supplier no.	703385
	author / date	TG / 18.06.2018