



<https://www.mega-piles.com/>

AAA


Industrial (LR03)

Specifications




| | |
|------------------|--|
| Classification: | Alkaline |
| Chemical System: | Zinc-Manganese Dioxide (Zn/MnO ₂) No added mercury or cadmium |
| Designation: | IEC-LR03 |
| Nominal Voltage: | 1.5 volts |
| Nominal IR: | 150 to 300 milliohms (fresh)* |
| Operating Temp: | -18°C to 55°C |
| Typical Weight: | 11.5 grams |
| Typical Volume: | 3.8 cubic centimeters |
| Jacket: | Plastic Label |
| Shelf Life: | 7 years at 21°C (80% of initial capacity) |
| Terminal: | Flat Contact |

Industry Standard Dimensions

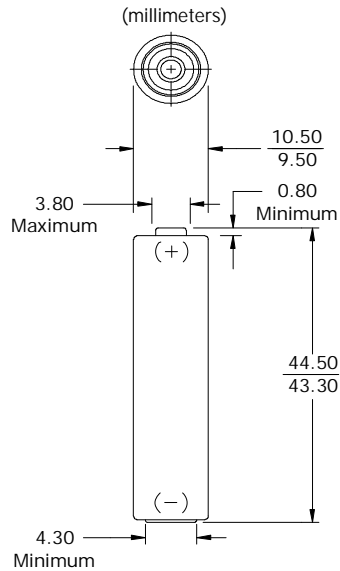


* For additional information, please reference the IR technical white paper.


Milliamp-Hours Capacity
Continuous discharge to 0.8 volts at 21°C

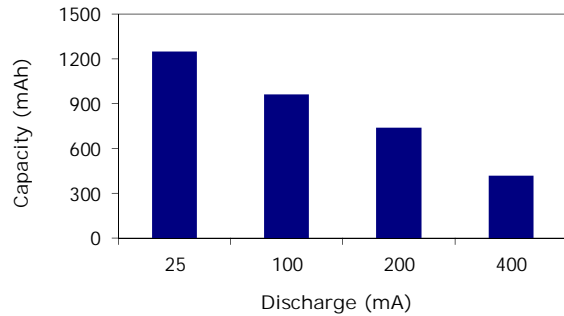

Industry Standard Testing (21°C):

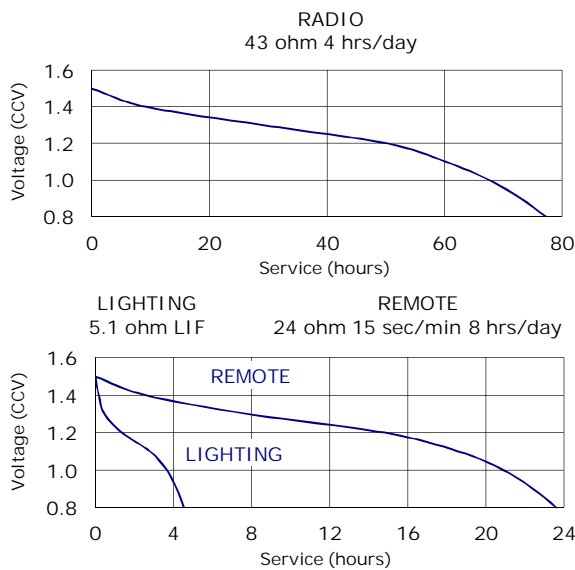

Battery Selection Indicator

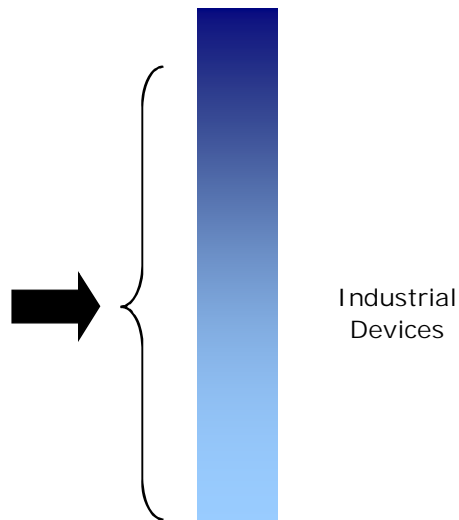

Important Notice

This datasheet contains typical information specific to products manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.