

battery type:
battery size:
chemical system:

lithium primary battery
 CR-2 (CR15H270)
 Manganese Dioxide Lithium Battery



<https://www.mega-piles.com/>

nominal voltage: 3.0 V
open circuit voltage: 3.0...3.5 V
closed circuit voltage: 2.9...3.4 V

conditions, remarks
 new battery
 measured after 1s under load of 50Ω

capacity measurements at 23°C ambient; new battery

rated: 850 mAh discharge at 1mA constant current; 24hours/day
 End Voltage (EV): 2.0V




minimum: 750 mAh discharge at 10mA constant current; continuous
 End Voltage (EV): 2.0V

550 mAh discharge at 500mA constant current; continuous
 End Voltage (EV): 2.0V

duration new battery

pulse load: load: 900mA for 3s, rest time 27s
 >900 cycles at 23°C; End Voltage (EV): 1.55V

discharge diagrams

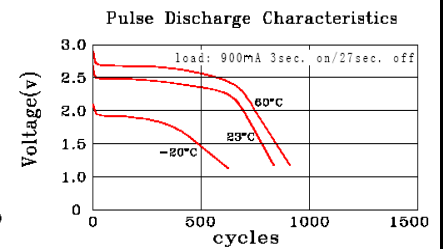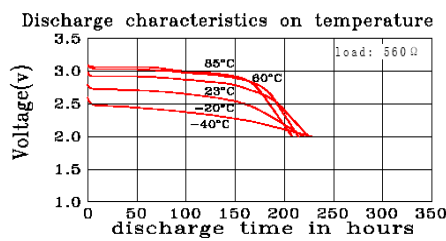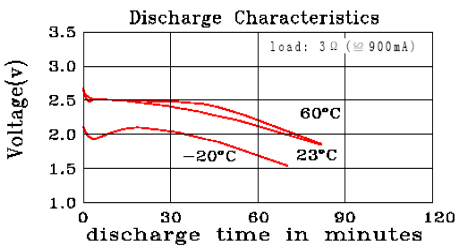

max. discharge current
 continuous: 800 mA
 pulse: 1600 mA

internal resistance: ≤ 0.7 Ω sine wave AC method (1kHz; 0.1mA) according to IEC 896-2

shelf life: 10 years under proper storage conditions


ambient temperature range:
 - 40...60 °C operating temperature
 - 20...45 °C storage temperature
 5...20 °C recommended storage temperature

relative humidity: ≤ 75% during storage

mechanical specifications

cell dimensions

diameter Ø1: 15.6 - 0.7 mm
 diameter Ø2: 6.5 - 1.0 mm
 height H1: 27.0 - 1.0 mm
 height H2: 1.5 - 0.9 mm
 weight: 11 ± 2 g



blister card dimensions: 123 x 86 mm
weight (incl. battery): 17 g

	ANSMANN Specifications for model:	CR-2 Lithium Battery
		1pcs blister package
	data sheet no. / part no.	5020022
	supplier no.	701801
	author / date	TG / 19.01.2018