


# DURACELL®

## Alkaline-Manganese Dioxide Battery

### MN908


### Size: Lantern (4LR25X)

Zn/MnO<sub>2</sub>

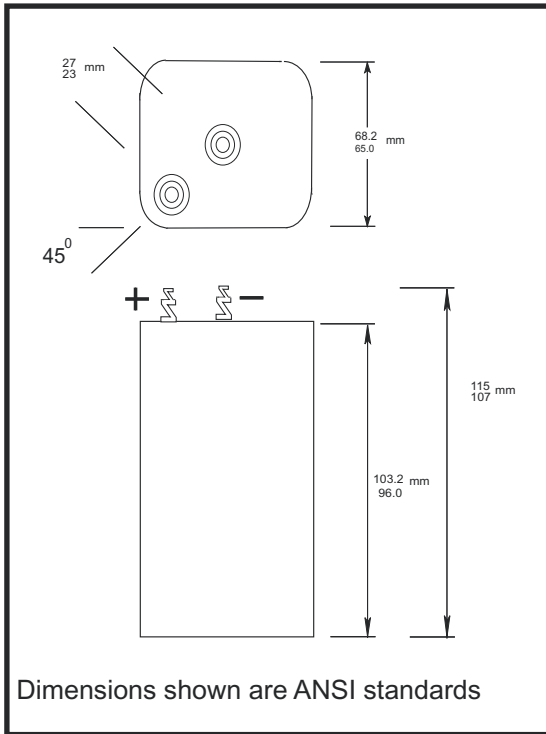


|                              |                                              |
|------------------------------|----------------------------------------------|
| Nominal Voltage:             | 6 V                                          |
| Nominal Internal Impedance:  | 600 m-ohm @ 1kHz                             |
| Average Weight:              | 624 gm (22 oz.)                              |
| Volume:                      | 446 cm <sup>3</sup> (22.2 in. <sup>3</sup> ) |
| Terminals:                   | Springs                                      |
| Operating Temperature Range: | -20°C to 54°C<br>(-4°F to 130°F)             |
| ANSI:                        | 908                                          |
| IEC:                         | 4LR25X                                       |

Typical Discharge Characteristics at 21°C (70°F)

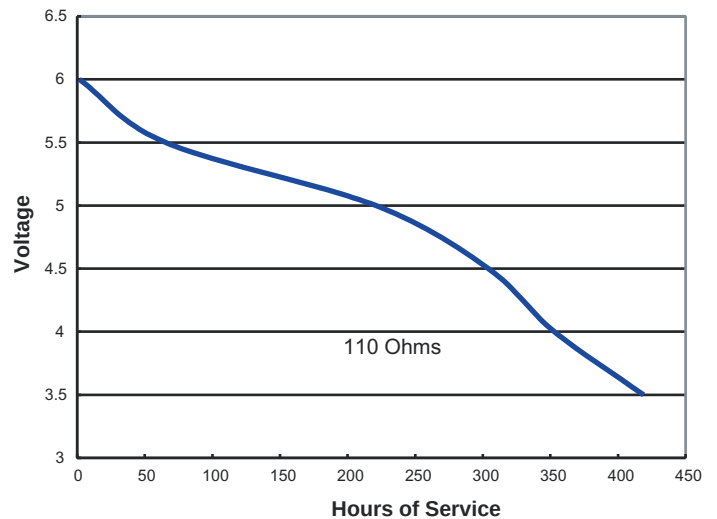

Typical Discharge Characteristics at 21°C (70°F)

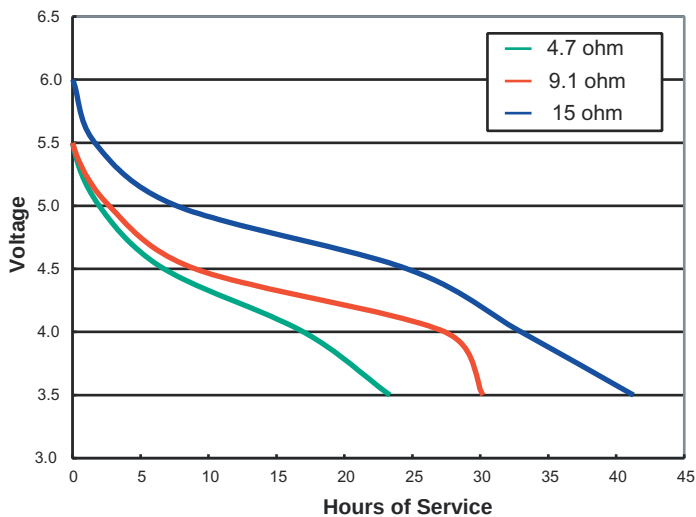

## DURACELL®

BATTERIES

Berkshire Corporate Park  
Bethel, CT 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
Internet: [www.duracell.com](http://www.duracell.com)

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.