


# DURACELL®

## Lithium/Manganese Dioxide Battery

# DL1/3N

Li/MnO<sub>2</sub>

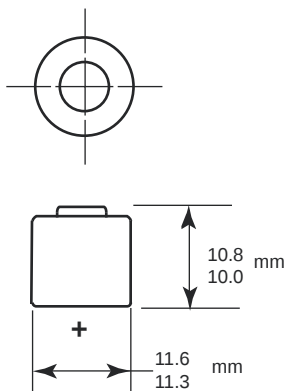


Dimensions shown are IEC/ANSI standards

|                              |                                  |
|------------------------------|----------------------------------|
| Nominal Voltage:             | 3.0 V                            |
| Typical Voltage:             | 3.0-3.3 V                        |
| Nominal Internal Impedance:  | 250 m-ohm @ 1kHz                 |
| Average Weight:              | 3 gm                             |
| Volume:                      | 1.1 cm <sup>3</sup>              |
| Terminals:                   | Flat, cap and base               |
| Operating Temperature Range: | -20°C to 60°C<br>(-4°F to 140°F) |
| ANSI:                        | 5008LC                           |
| IEC:                         | CR11108                          |



<https://www.mega-piles.com/>

### DL1/3N Discharge Load vs Capacity to 2.0 volts

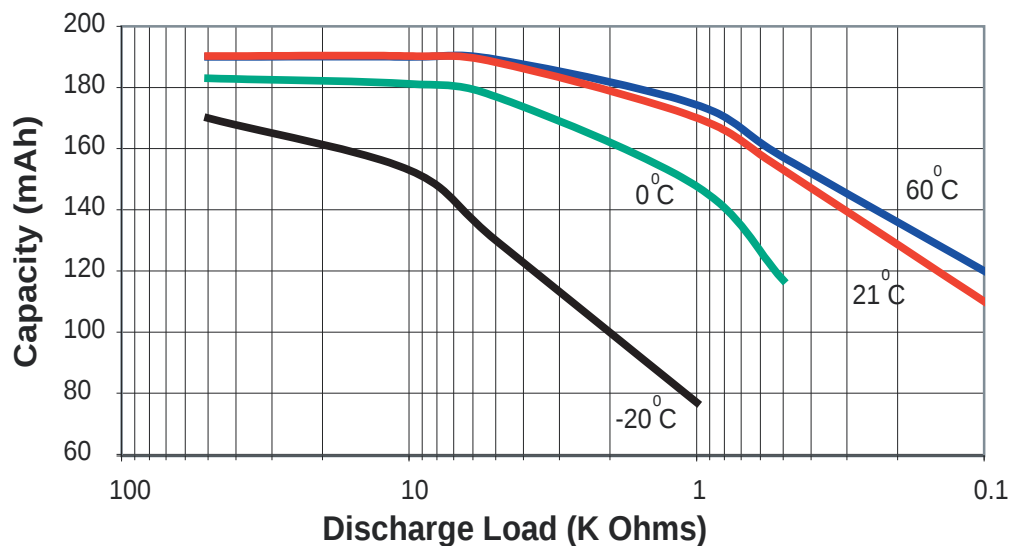

# DURACELL®

BATTERIES

Berkshire Corporate Park  
Bethel, CT 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
Internet: [www.duracell.com](http://www.duracell.com)

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.