
DURACELL®

MEGA-PILES
https://www.mega-piles.com/

PX28L

Li/MnO_2


Lithium/Manganese Dioxide Battery

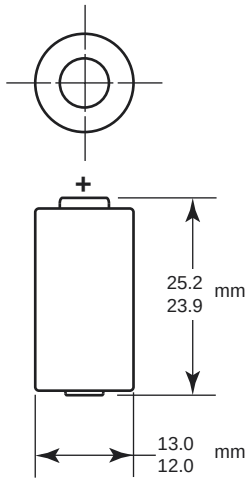


Dimensions shown are IEC/ANSI standards

Nominal Voltage:	6.0 V
Typical Voltage:	6.0-6.6 V
Nominal Internal Impedance:	700 m-ohm @ 1kHz
Average Weight:	9.4 gm
Volume:	2.8 cm^3
Terminals:	Flat, cap and base
Operating Temperature Range:	-20°C to 60°C (-4°F to 140°F)
NEDA/ANSI: IEC:	1406LC 2CR11108

Typical Discharge Characteristics

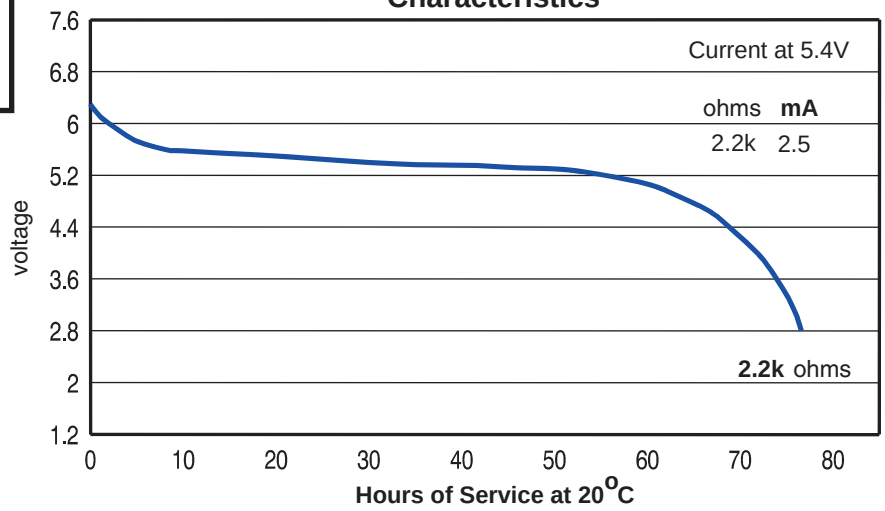

Typical Discharge Characteristics

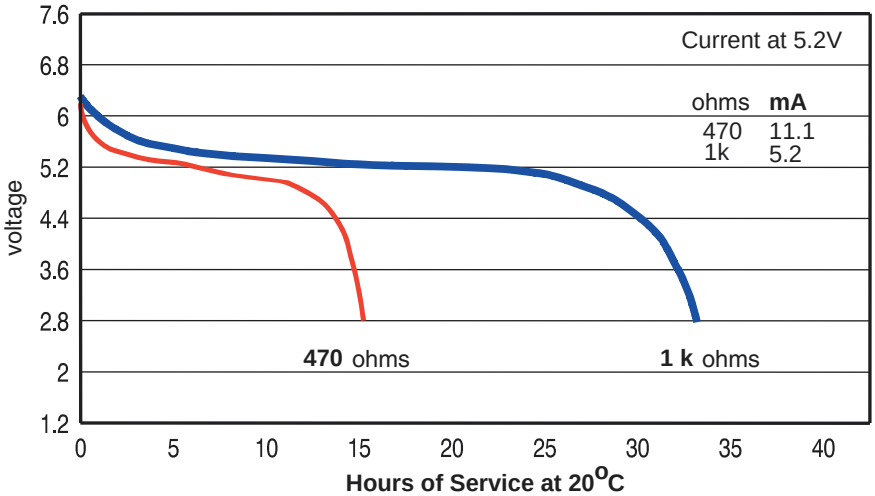

DURACELL® BATTERIES
Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.

This data is subject to change. Performance information is typical. Contact Duracell for the latest information