


**ENERGIZER 364/363**

**SILVER OXIDE**



**Industry Standard Dimensions**

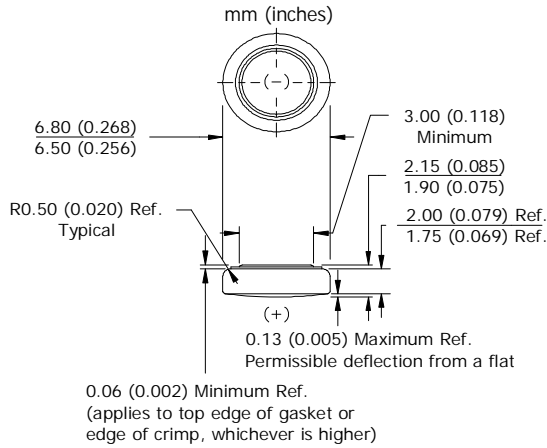


DESIGNED FOR USE ON CONTINUOUS LOW DRAIN  
HIGH PULSE ON DEMAND

**Specifications**

Chemical System:	Silver Oxide (Zn/Ag <sub>2</sub> O)
Designation:	IEC-SR60
Nominal Voltage:	1.55 Volts
Typical Capacity:	23 mAh* (to 1.2 volts)
Capacity Test:	68K ohm continuous drain at 21°C
Typical Weight:	0.37 grams
Typical Volume:	0.08 cubic centimeters
Impedance (40 Hz):	5 to 15 ohms

\* Varies according to the applied load, temperature, and cutoff voltage.


**Cross Section**

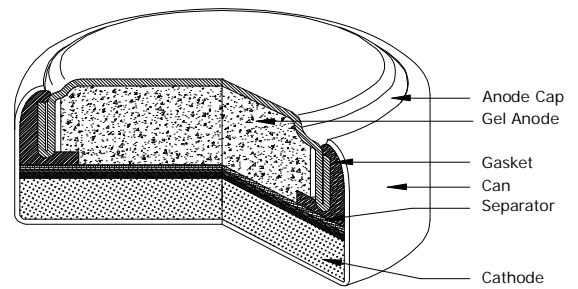

**Typical Discharge Characteristics**

Typical Performance at 21°C (70°F)

Schedule: Continuous  
Typical Drain @ 1.47V:  
0.022 milliamperes  
Load: 68K ohm

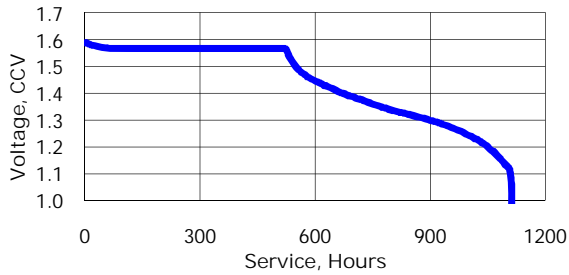


Schedule	Typical Drains at 1.47V (milliamperes)	Load (ohm)	Cutoff (hours)
Continuous	0.022	68K	1,045


**Temperature Characteristics**

Typical Performance at Low Discharge Rates

**Service Effects**

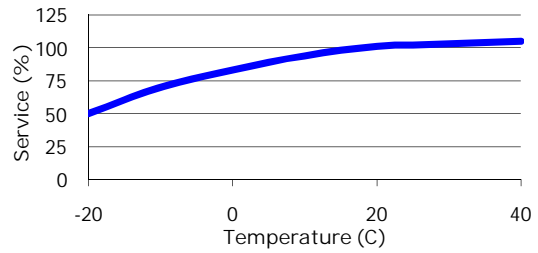

**Storage Effects**

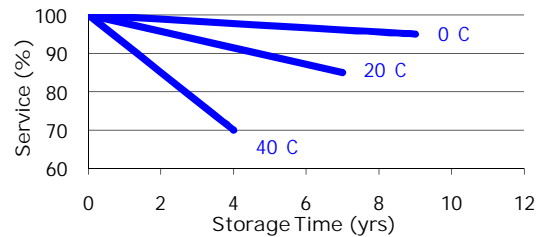

**Important Notice**

This datasheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.