




<https://www.mega-piles.com/>

AA

# Eveready Gold (LR6)



## Industry Standard Dimensions

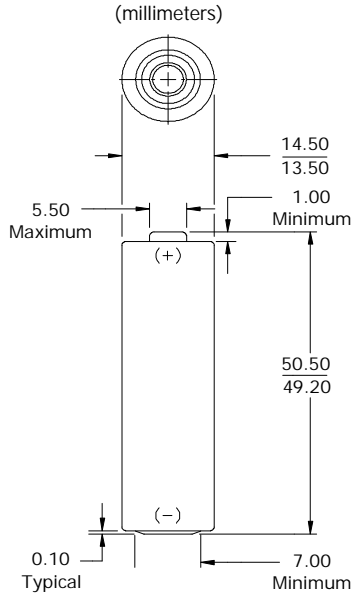


## Specifications

Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO <sub>2</sub> ) No added mercury or cadmium
Designation:	IEC-LR6
Nominal Voltage:	1.5 volts
Operating Temp:	-18°C to 55°C
Typical Weight:	23.0 grams
Typical Volume:	8.1 cubic centimeters
Jacket:	Plastic Label
Shelf Life:	7 years at 21°C (80% of initial capacity)
Terminal:	Flat Contact

## Performance Comparison

Eveready Gold vs. Typical Carbon Zinc (AA) at 21°C

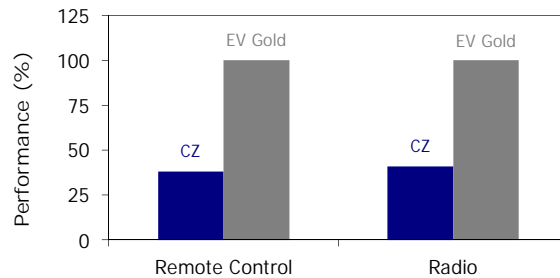


Industry Standard Testing Protocol

## Device Selection Guide:

- Digital Camera
- Photoflash
- Games, CD's, MD's
- Tape Player
- Lighting
- Toy
- Remote Control
- Radio
- Clock

## Battery Selection Indicator

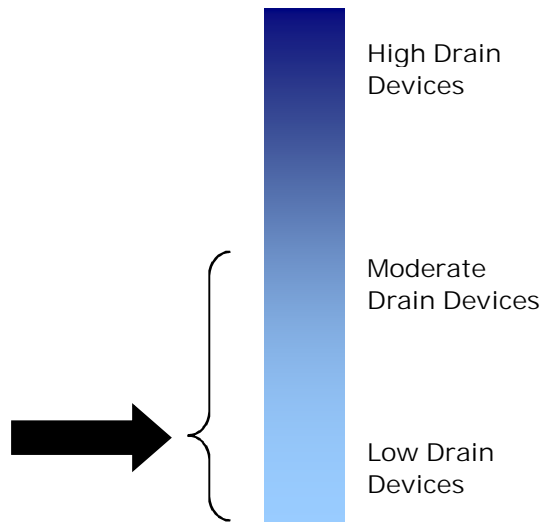

### Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.