


Eveready Silver AAA (R03)

AAA



Industry Standard Dimensions

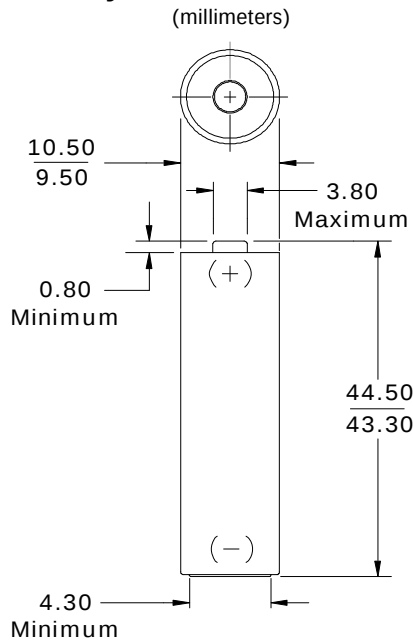

Specifications


Classification:	"Carbon Zinc" (Zinc Chloride)
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO ₂) No Added Mercury or Cadmium
Designation:	IEC-R03
Nominal Voltage:	1.5 volts
Typical Capacity:	540 mAh* (to 0.8 volts)
Capacity Test:	25 mA continuous drain (21°C)

* Varies according to the applied load, temperature, and cutoff voltage.





Operating Temp:	-18°C to 55°C
Typical Weight:	9.7 grams
Typical Volume:	4.0 cubic centimeters
Jacket:	Metal

Storage/Capacity Characteristics

Effects of Storage at Various Temperatures

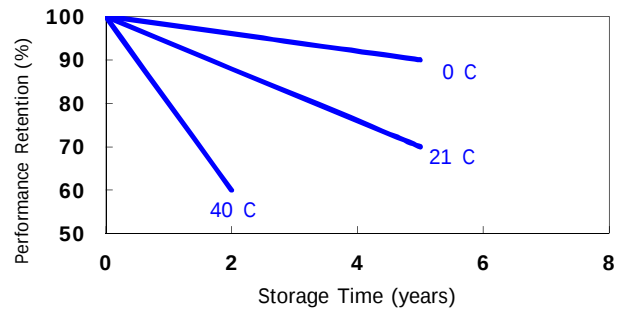

Industry Standard Tests (21°C)

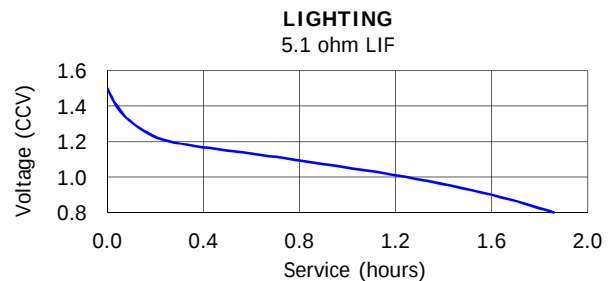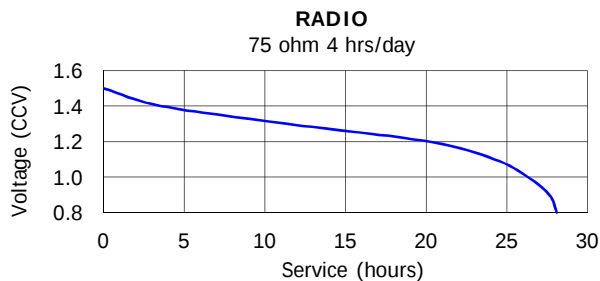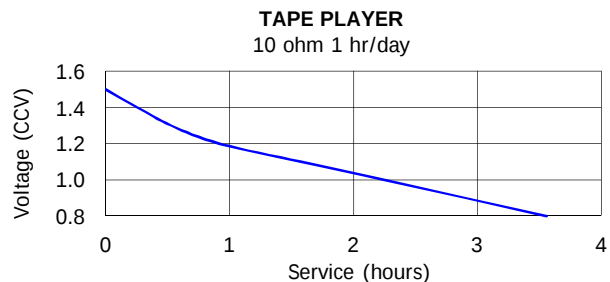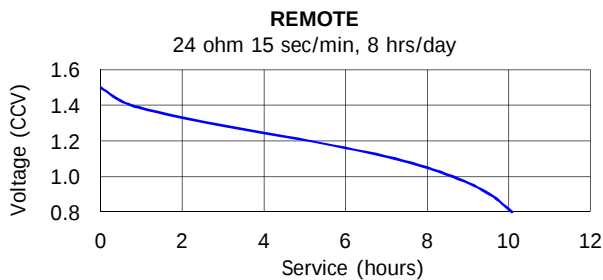

Important Notice

This datasheet contains information specific to battery chargers manufactured at the time of its publication.
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.