


Cell Type BK-3HCC

Specifications

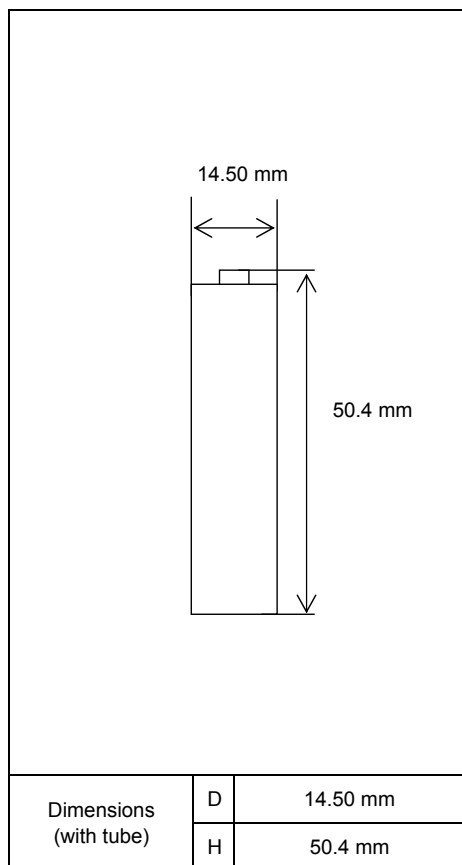


Type : Nickel-Metal Hydride Battery			Size : AA Consumer Type
Capacity ¹⁾	Typical		2550mAh
	Minimum		2450mAh
Nominal Voltage			1.2V
Charging Current x Time		Fast Charge ²⁾	2550mA × 1.1h
Ambient Temp.	Charge Condition	Fast Charge ²⁾	0°C - 40°C
	Discharge Condition		0°C - 50°C
		Less than 90days	-20°C - 40°C
		Less than 1year	-20°C - 30°C
Internal Impedance ³⁾ (after discharge to E.V.=1.0V)			Approx. 25m Ω (at 1KHz)
Weight ⁴⁾			Approx. 30 g
Size ⁴⁾ :(Diameter) x (Height)			φ :14.5mm X H:50.4mm

- 1) Single cell capacity under the following condition.
 Charge : 250mA x 16h, Discharge : 500mA (E.V.=1.0V) at 25deg.C
 2) Use recommended charging system.
 3) After a few charge and discharge cycles under the above 1) condition.
 4) With Label.

Typical Characteristics

Charge

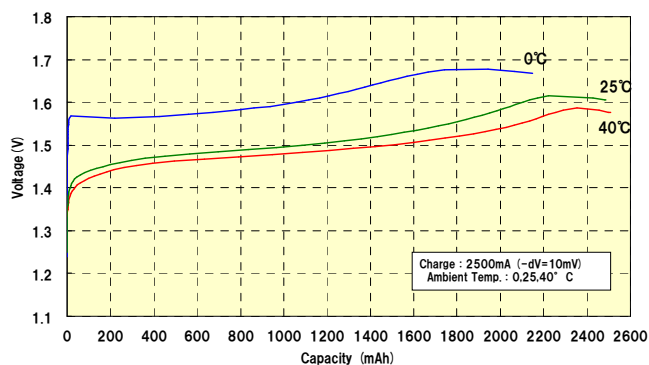

Discharge

