


# 4/ V625U

## Data Sheet

### Alkaline Manganese

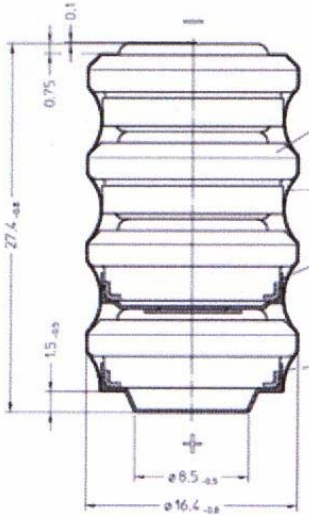

Type Designation 4026  
 Designation IEC 4LR 9  
 System Manganese Dioxide /  
 Zinc / KOH – Electrolyte

Nominal Voltage [V] 6,0  
 Typical Capacity C [mAh] 200  
 Load 300 Ohm, at 20 °C down to 3,6 V

Weight, approx. [g] 13,3  
 Volume [ccm] 4,0

	min.	max.
Permissible Temperature Range	- 10 °C	65 °C

#### Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage[V]	3,6
Continuous	300 Ω	Time [h]	48
24h/d, 7d/w		Capacity [mAh]	200
Current [μA]	5000	Energy [mWh]	1000